
STELLA 3 SSLED

INSTALLATION INSTRUCTIONS OF LUMINAIRE STELLA 3 SSLED





- •The installation of the unit must be done by a qualified electrician.
- •The unit must be earthed in case an earth connecting point exists.
- •Ensure that the mains is switched off during servicing.
- Ensure that after the installation, the unit is properly fixed and the cable clamps (if exist) are well tightened.
- Manufacturer will not accept liability for injury or damage resulting from incorrect use or installation
- •The unit is not intended to operate in loop connection.
- Wall plugs and terminals are not included.
- •LED modules are replaced only by the manufacturer.

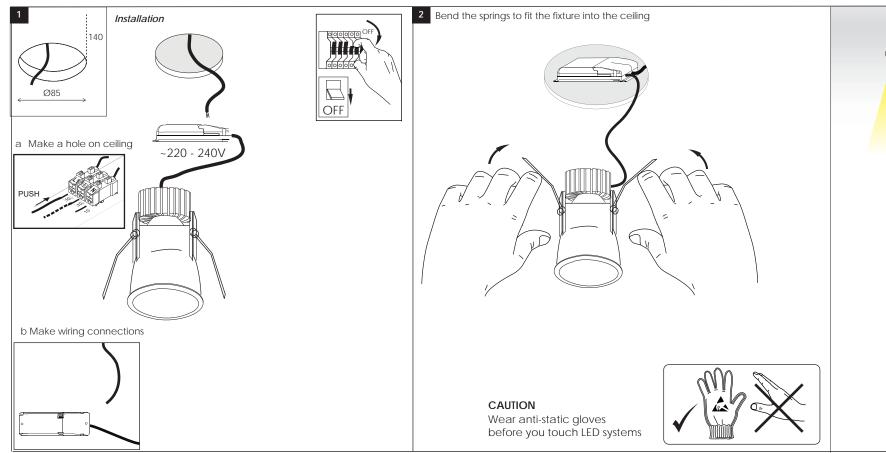

CAUTION

Wear anti-static gloves before you touch LED systems







Last update: February 2017







