
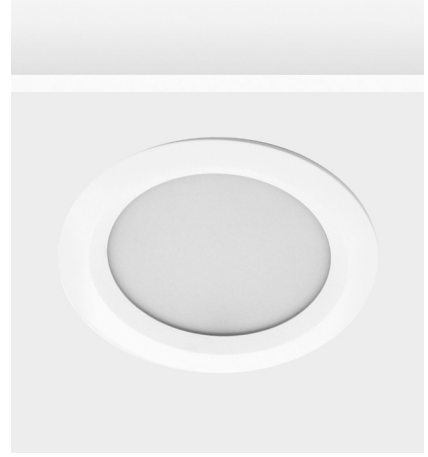
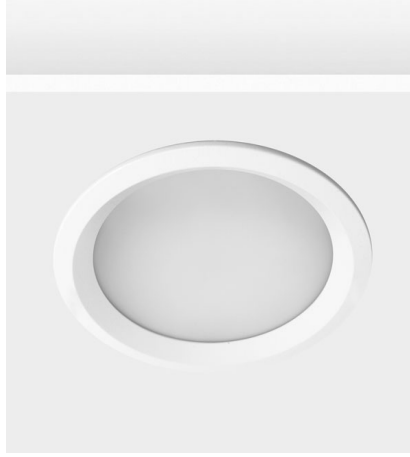



STATUR | STATUR SMALL | STATUR SMALL 24

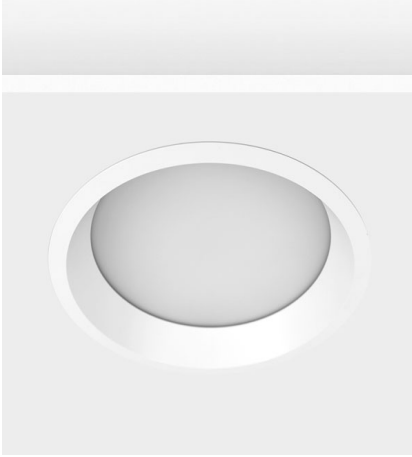

■ **STATUR**

■ **STATUR SMALL**

■ **STATUR SMALL 24**

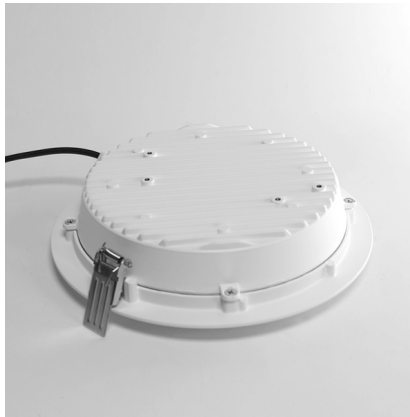

■ **PRODUCT BENEFITS**

- High Lumen efficiency
- Uniform light
- 5 years guarantee

■ **AREAS OF APPLICATION**

- Retail shops
- Offices
- Public accesible areas

TECHNICAL DATA

Electrical Data

| | |
|------------------------|---------------------------------|
| Nominal Voltage | 220-240V |
| Mains Frequency | 50/60Hz |
| Power Factor λ | >0,95 |
| Operating Mode | Independent ECG for LED modules |
| Output Current Ripple | $\leq 3\%$ |

Photometric Data


| | |
|---|-----------------------|
| Standard Deviation of Color Matching (SDCM) | ≤ 3 SDCM |
| CRI | >80 90 upon request |
| Beam Angle | 100° |
| Transmittance | 78% |
| Efficiency | Up to 170 lm/W |

Luminaire's output Data

| Wattage (W) | CCT (K) | Lumen Output (lm) | Efficiency (lm/W) |
|-------------|---------|-------------------|-------------------|
| 14,6 | 3.000 | 1.800 | 123 |
| | 4.000 | 1.950 | 134 |
| 16,3 | 3.000 | 2.000 | 122 |
| | 4.000 | 2.100 | 129 |
| 19,9 | 3.000 | 2.350 | 118 |
| | 4.000 | 2.500 | 125 |
| 21,8 | 3.000 | 2.500 | 115 |
| | 4.000 | 2.650 | 121 |
| 23,7 | 3.000 | 2.700 | 113 |
| | 4.000 | 2.800 | 118 |

TECHNICAL DATA

■ Dimensions & Weight

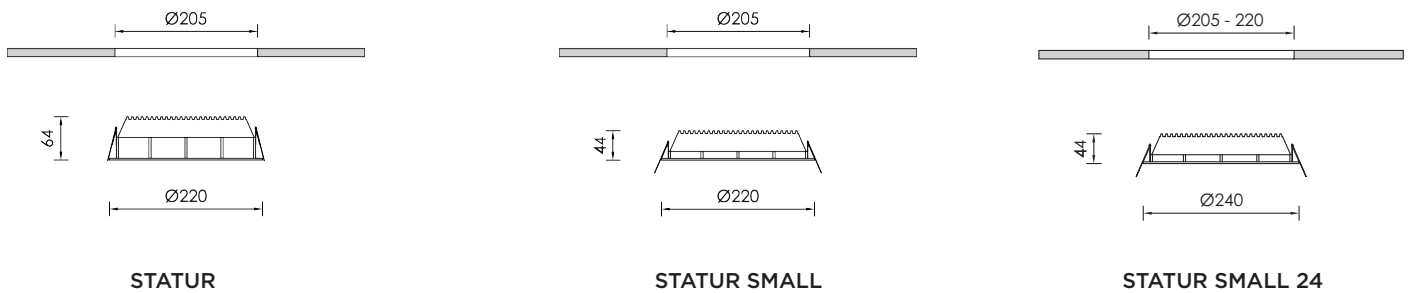

| | |
|---------------------------------------|---------|
| Diameter STATUR / STATUR SMALL | 220mm |
| Diameter STATUR SMALL 24 | 240mm |
| Height STATUR | 64mm |
| Height STATUR SMALL / STATUR SMALL 24 | 44mm |
| Weight | ≈1.0 kg |

■ Colors & Materials

| | |
|-------------------|----------------------|
| Body Material | Cast Press Aluminium |
| Diffuser Material | Opal PMMA |

■ Temperatures & Operating Conditions

| | |
|---------------------------------------|------------------|
| Ambient Temperature Range | -20 ... +45°C |
| Ambient Relative Humidity Range | 10 ... 95% R.H |
| Storage Temperature | -20 ... +75°C |
| Max. Ambient Temperature for Lifetime | +35°C |
| Lifetime at 35°C Ambient Temperature | > 50.000h L80B10 |

■ Safety Characteristics

| | |
|-------------------------|----------|
| Impact Resistant (IK) | 05 |
| Ingress Protection (IP) | 54 |
| Protection Class | Class II |
| Glow Wire Test | 650°C |
| Photobiological Safety | RG1 |
| Certifications | CE |


TECHNICAL DATA

■ General Characteristics

| | |
|------------------------|--------------------------|
| Dimmable | 1 - 10V / DALI / CASAMBI |
| Emergency Lighting | Upon request |
| Connection Type | Screwless terminal |
| LED module Replaceable | Only by the manufacturer |
| Mounting Type | Recessed |
| Mounting Location | Ceiling Recessed |
| Warranty | 5-years |

■ Light Distribution

■ Opal cover

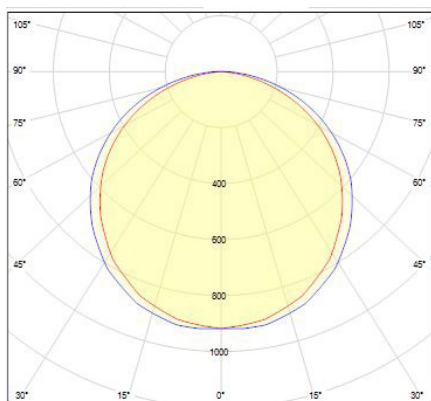

■ REFERENCES / LINKS

For warranty details see:

https://www.bright.gr/uploads/files/2018/10/warranty_periods_v1_5_4696.pdf

Warranty terms and conditions:

https://www.bright.gr/uploads/files/2018/07/3013_3244.pdf